




ImagePro 8064 Portable LCD Projector

- 1500 lumen brightness
- SVGA resolution
- Easy to transport, only 4.8 lbs.
- Progressive scan
- 4 X digital magnification
- HDTV ready
- Vertical keystone correction
- Remote control

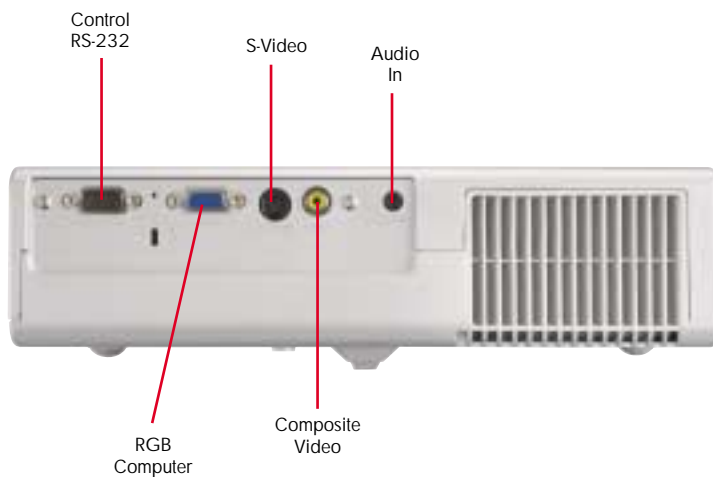

8064
DUKANE

ImagePro 8064

Premium-quality LCD projector

The Dukane ImagePro 8064 is an ultra-portable projector that makes presentation setup fast and easy. Powerful yet versatile LCD projector designed to open new possibilities in multimedia projection.

This affordable LCD projector is ideal for classrooms and conference rooms. The 8064 is sure to impress with realistic colors and 1500 ANSI lumens brightness.



Key features:

- SVGA (800 x 600) resolution
- 1,500 ANSI lumens of brightness
- Vibrant rich colored images
- Easy carry 4.8 lbs.
- Fixed Zoom & Manual Focus
- Remote Control
- Custom image for your startup and blank screens
- Progressive scan
- 4x Digital Magnification
- HDTV Compatible
- "Silent Running" so you hear only your message
- Vertical keystone correction
- Two Year Warranty and One Year Peace of Mind Service

8064 Projection Table

Image Size 4:3		Throw Distance
Diagonal*	Width*	
40	32	57
60	48	87
80	64	116
100	80	145
120	96	174
150	120	218
200	160	291

Throw Ratio 1.8:1 (distance to width)

* Measured in Inches

DUKANE

Audiovisual Products
2900 Dukane Drive
St. Charles, Illinois 60174
www.dukcorp.com/av



Toll-free: 800-676-2485
Fax: 630-584-5156
E-mail: avsales@dukcorp.com

Specifications

Image Element	0.55" polysilicon active-matrix TFT x3
Brightness	1500 ANSI lumens (1100 lumens in Whisper Mode)
Resolution	800 x 600 pixels (H X V)
Contrast	300:1
Scanning Frequency	fh 15-91 kHz, fv 50-120 Hz
Lens	Manual focus (F1.65)
Lens Throw Ratio	1.8:1 throw distance to image width
Keystone Correction	Digital, vertical +/-15 deg
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, Compressed PC and Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM HDTV (1080i, 720p, 575i, 480i/p)
Image Control	Freeze function, electronic magnification and pan
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	165W UHB
Lamp Life	2000 hours (typical)
Audio	1 speaker 1 watt
Throw Distance	60" to 300"
Screen Size, diagonal	40" to 200"
Inputs, Video	(1) Composite video, RCA x 1 (1) S-video, Mini DIN 4-pin
Inputs, Computer	(1) RGB, 15 pin D-sub
Inputs, Audio	(1) Stereo mini jack
Outputs, Control	RS-232, 9 pin D-sub
Security	Kensington lock slot
Fan Level	38dB, ultra quiet 32dB in Whisper Mode
Operating Temperature	32-95 deg F
Power	AC 100-120V, AC220-240V 50/60 Hz, 240 watt
Size (WxHxD)	11.2" x 2.9" x 7.9"
Weight	4.8 lbs.
Shipping Weight	15 lbs.
Carton Size	16" x 14" x 12"
Accessories Included	Remote control, batteries, power RGB cable, operators manual and lens cap, strap, filter cover
Safety	UL/C-UL, FCC Class B, CE, TUV
Optional Accessories	Lamp 456-8064

Two (2) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply).

Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

2YR