




ImagePro 8777 Portable LCD Projector

- LCD Technology
- 2500 Lumens Brightness
- XGA Resolution
- 600:1 Contrast Ratio
- Portable, Only 6.4 lbs.
- Full Connectivity with 2 Video and 3 Computer Inputs
- Automatic Keystone Correction
- Powerfull 5 Watt Speaker
- Quiet Operation

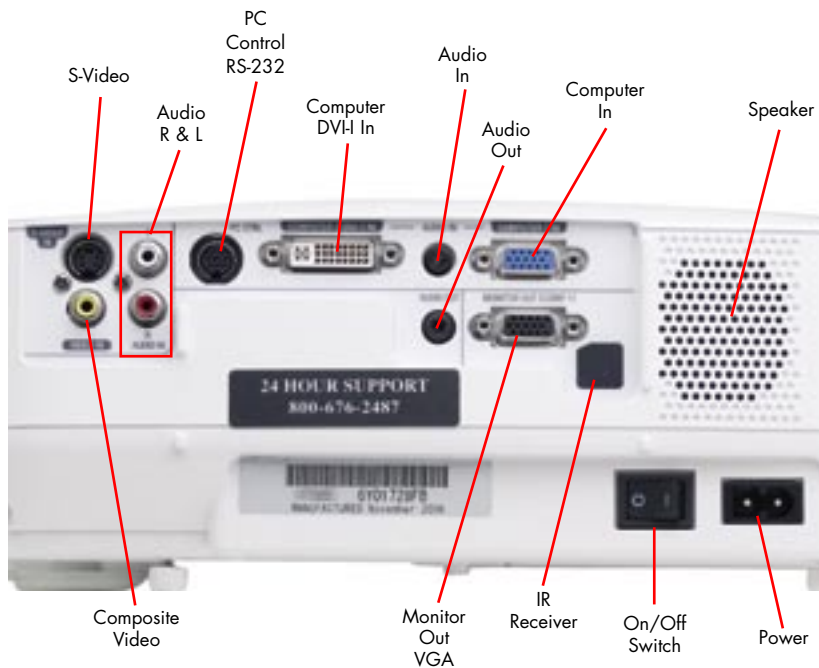

8777 DUKANE

ImagePro 8777 Portable LCD projector

The Dukane ImagePro™ 8777 is an affordable full featured LCD projector that is ideal for most classrooms or conference rooms. Start-up is only 9 seconds. So you can get to your presentation faster without waiting.



This full-featured LCD projector has outstanding video and computer images. With its extensive connections you can hook up to a multitude of sources. It has full XGA resolution (1024 x 768) and a powerful five watt speaker so your presentation can be heard in most any environment.

Key features:

- LCD Technology
- 2500 Lumens Brightness
- XGA Resolution
- 600:1 Contrast Ratio
- Portable, Only 6.4 lbs.
- Full Connectivity with 2 Video and 3 Computer Inputs
- Automatic Keystone Correction
- Powerfull 5 Watt Speaker
- Quiet Operation
- Monitor Loop Through

8777 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	3.3	3.6
60	48	6.0	7.0
72	58	7.2	8.6
90	72	9.0	10.8
100	80	10.0	12.0
200	160	20.0	24.0
250	200	25.0	30.0
300	240	30.0	35.0

Throw Ratio (distance to width) 1.50 1.80

DUKANE

Audio Visual Products
2900 Dukane Drive
St. Charles, Illinois 60174
www.dukcorp.com/av



Toll-free: 800-676-2485
Fax: 630-584-5156
E-mail: avsales@dukcorp.com

Specifications

Image Element	0.6" LCD
Brightness	2500 ANSI lumens 1900 (whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	600:1
Scanning Frequency	fh 15 to 100 kHz, fv 50 to 120 Hz
Lens	Manual zoom, (18.9-22.7mm), 1.2x
Lens Throw Ratio	1.5 - 1.8:1 throw distance to image width
Keystone Correction	Automatic or Manual +/-30 deg.
Aspect Ratio	4:3 native, 16:9 selectable
Computer Compatibility	VGA, SVGA, XGA, SXGA, SXGA+, UXGA and MAC
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-60, PAL-M, PAL-N, SECAM, HDTV 1080i, 720p, 576p, 480p, 480i, Y/Cb/Cr component (with optional adapter - ADP-CV1E)
Mouse Control	With optional IR Receiver
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	200W DC/150W (Whisper Mode)
Lamp Life	2000 hours (3000 hours Whisper Mode)
Audio	5W x 1
Throw Distance	40" to 400"
Screen Size, diagonal	21" to 300"
Inputs, Video	(1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 Audio, Stereo RCA x 2 (L&R)
Inputs, Computer	(1) RGB Signal: D-sub, 15 pin (1) DVI-I (1) Audio, Stereo mini jack
Outputs Monitor	15 pin, D-sub
Outputs Audio	Audio, Stereo mini jack x 1
Outputs, Control	RS232
Security	Kensington slot
Fan Level	35dB, (29dB in whisper mode)
Operating Temperature	41 to 95 deg. F (5-40 deg C)
Power	AC 100-240V, 50/60 Hz, 280W
Size (WxHxD)	12.2" x 4.4" x 10.2"
Weight	6.4 lbs.
Carton Size	16.3" x 11.8" x 14.1"
Shipping Weight	11.4 lbs.
Accessories Included	Remote control, batteries (AA), power cord, Computer Cable (DVI-RGB), S-Video Cable, DVI-I-VGA Adapter CDROM, Carry Case, User Manual
Safety	FCC-B, UL/Cul, TUV, CB, CE, CCC
Optional Accessories	Lamp 456-8777, IR-Receiver (IR-RVCR), Ceiling mount, universal; RPA-U

Three (3) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply).

Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

3YR