




## ImagePro 8935 Portable LCD Projector

- 3500 lumen brightness
- XGA resolution
- 750 to 1 contrast ratio
- Easy lamp replacement
- Optional bayonet lenses available
- Lens shift
- Progressive scan
- Keystone Correction
- Wired and wireless LAN (RJ45)

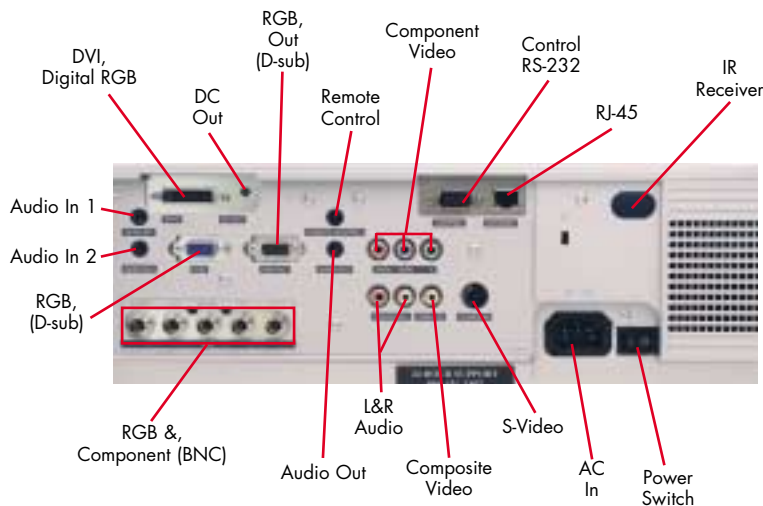

**Exclusive five year warranty**  
the best warranty in the industry



# 8935 DUKANE

# ImagePro 8935

## Portable LCD projector

The Dukane ImagePro 8935™ delivers high brightness, that can be used in a wide range of places. The lens shift function and a selection of optional, interchangeable lenses also contribute to installation ease. A variety of functions for high picture quality and network compatibility are included. Providing realistic colors, sharp contrast, and super bright images. The 8935 enables presentations with persuasive impact in a variety of situations.

Position the 8935 on a table, rack, or installed in a ceiling mount. The unit can be controlled by the remote control and easily adjusted even when ceiling mounted.



This full-featured LCD projector is ideal for classrooms, conference rooms or other locations where a bright image is required.

### Key features:

- 3500 lumen brightness
- XGA resolution
- 750 to 1 contrast ratio
- Easy lamp replacement
- Optional bayonet lenses available
- Lens shift
- 2000 hour lamp life
- Progressive scan technology
- Remote control
- Digital keystone correction
- Wired and wireless LAN capability
- Network control
- Picture-In-Picture
- Five year warranty and One year Peace-of-Mind service

# DUKANE

Dukane Corporation  
 Audio Visual Products Division  
 2900 Dukane Drive  
 St. Charles, Illinois 60174  
 800-676-2485 or 2486  
 630-584-5156  
 avsales@dukcorp.com  
 www.dukcorp/av.com



toll-free  
 fax  
 e-mail

ImagePro is a registered trademark of Dukane Corporation  
 #11638-D-04

## Specifications 8935

Image Element	0.99" polysilicon TFT x3, MLA
Brightness	3500 ANSI lumens 2800 (whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	750 to 1
Scanning Frequency	fh 15-91 kHz, fv 50-120 Hz
Lens	Power zoom (F=1.7 to 2.4), 1.5X
Lens Throw Ratio	1.5 -2.2:1 throw distance to image width
Keystone Correction	Digital, vertical +/-15 deg, horizontal +/- 5 deg
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA, and SXGA/UXGA Compressed, Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 720p, 575i, 480i/p
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using M1 to USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	275W UHB
Lamp Life	2000 hours
Audio	1.0 W x 2
Throw Distance	46" to 364"
Screen Size, diagonal	40" to 500"
Inputs, Video	(1) Component, RCA x 3, BNC (shared) (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 Audio, Stereo, RCA x 2
Inputs, Computer	(1) RGB Signal: D-sub, 15 pin (1) BNC x 5 (shared), RGBHV (1) M1-D (digital RGB) & Audio, Stereo mini jack x 2
Outputs Monitor	15 pin, D-sub Audio, Stereo mini jack x 1
Outputs,Control	9 pin D-sub Connector, RS-232 M1-D with USB for mouse 3.5mm mini jack (wired remote control)
Network	RJ-45 port / 10Base-T
Security	Kensington slot
Fan Level	39dB, (35dB in whisper mode)
Operating Temperature	32 to 95 deg. F (0-35 deg C)
Power	AC 100-120V, AC220-240V 50/60 Hz, 430 watt
Size (WxHxD)	16.5" x 6.3" x 12.6"
Weight	17 lbs.
Carton Size	20.5" x 13.5" x 19"
Shipping Weight	27 lbs.
Accessories Included	Remote control, batteries, power cord, RGB Cable, Video/Audio Cable, M1 cable (DVI & USB to M1), and operator/safety manual.
Safety	UL/CSA, FCC/DOC Class B, CE
Optional Accessories	Lamp 456-8935

Five (5) year limited warranty on parts and labor in North America,  
 lamp excluded (for other locations, local warranties apply). Includes  
 Dukane's FREE 1 year Peace-of-Mind Loaner Program.

# 5YR