


3M™ Overhead Projector

Model 1620

Enhanced Visual Quality, Affordable

When the visuals in your lectures and presentations demand higher quality, the open triplet projection head on the 3M™ 1620 provides sharp, defined images at a surprisingly affordable price. Designed to be versatile and durable, this projector has a triple-element lens for image clarity, requires no assembly, and folds down for easy storage.

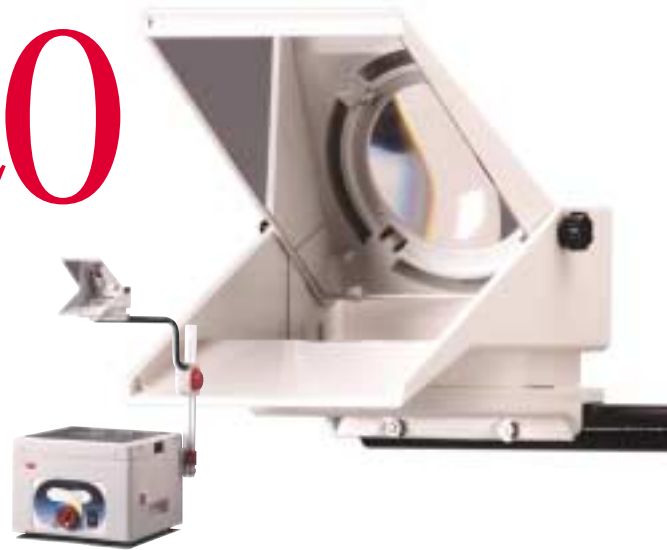

KEY FEATURES

- > Open triplet projection head for sharper images
- > 2,100 lumens enhance your visuals even with the room lights on
- > No assembly required
- > 11.25" x 11.25" staging area gives you room to maximize your message.
- > Lamp Changer enables instant bulb replacement
- > Fold-down post allows easy storage
- > High/Low switch provides options for lamp brightness. Low setting generally lengthens lamp life
- > Color Tuning dial gives you the ability to adjust the clarity and the whiteness of the screen
- > 2 Year Warranty
 - *see product packaging for warranty terms and conditions

ORDER NUMBER: 78-9236-6808-7

UPC Code: 0-51125-60699-8

OPTIONAL ACCESSORIES: Replacement lamp, roller attachment, roller-attachment film, and dust cover

TECHNICAL SPECIFICATIONS

OPTICAL PERFORMANCE

- > Head: **Open triplet** (*three elements*)
- > Illumination: **2,100 ANSI lumens typical**
- > Stage aperture: **285.75 mm x 285.75 mm** (*11.25" x 11.25"*)
- > Stage temperature: **46°C** (*115°F*)
- > Focal Length: **320 mm** (*12.6"*)

LAMP DESCRIPTION

- > **Lamp changer (1 Lamp included)**
- > Lamp Type: **EHJ** (*24 volts, 250 watts*)
- > Lamp Life: **50 hours average**

PHYSICAL CHARACTERISTICS

- > Width: **343 mm** (*13.5"*)
- > Depth: **343 mm** (*13.5"*)
- > Height(body): **267 mm** (*10.5"*)
- > Weight: **30 lbs.** (*13.6 kg*)

ELECTRICAL FEATURES

- > Power-cord length: **3 m.** (*10'*)
- > Voltage rating: **120VAC, 60Hz**
- > Agency approval: **UL/cUL**

MECHANICAL

- > **Thermal protection circuit:** cuts power to the lamp if the projector exceeds safe operating temperature.
- > **Fold-down post**

Ask
about 3M
LAMPS!

1.800.328.1371

www.3M.com/meetings

Visual Systems Division
Building A145-5N-01
6801 River Place Blvd.
Austin, TX 78726-9000

3M Canada
P.O. Box 5757
London, Ontario, Canada
N6A 4T1

3M Mexico, S.A. de C.V.
Apartado Postal 14-139
Mexico, D.F. 07070
Mexico

Specifications subject to change without notice. LITHO in USA © 3M 2003
78-6970-8566-6 (7/03.15m.FG)

3M Presentation Solutions